


***ROSE***

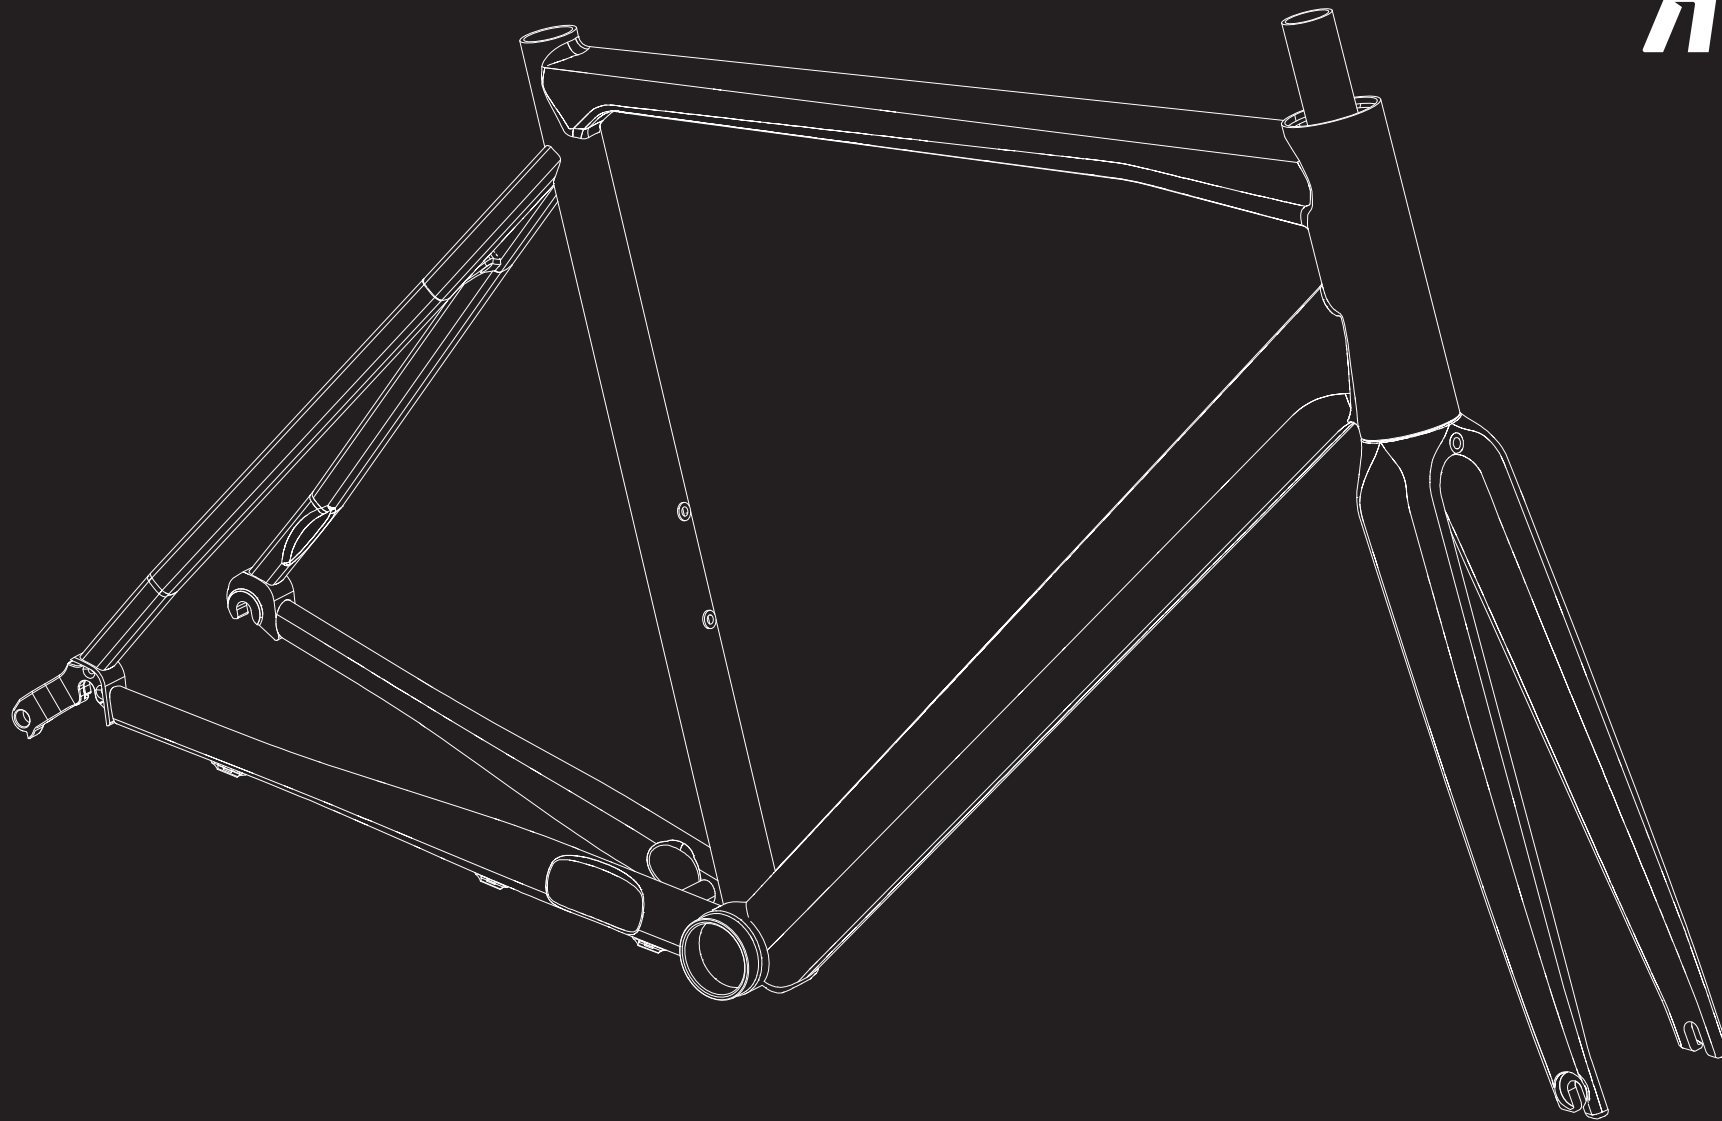

**ANY QUESTIONS?**

[technik@rosebikes.com](mailto:technik@rosebikes.com)



ROSE Bikes GmbH  
Schersweide 4  
46395 Bocholt, Germany

***PRO<sup>SL</sup>***

RIM BRAKE  
**FRAME DETAILS**

# PRO SL

## RIM BRAKE FRAME DETAILS

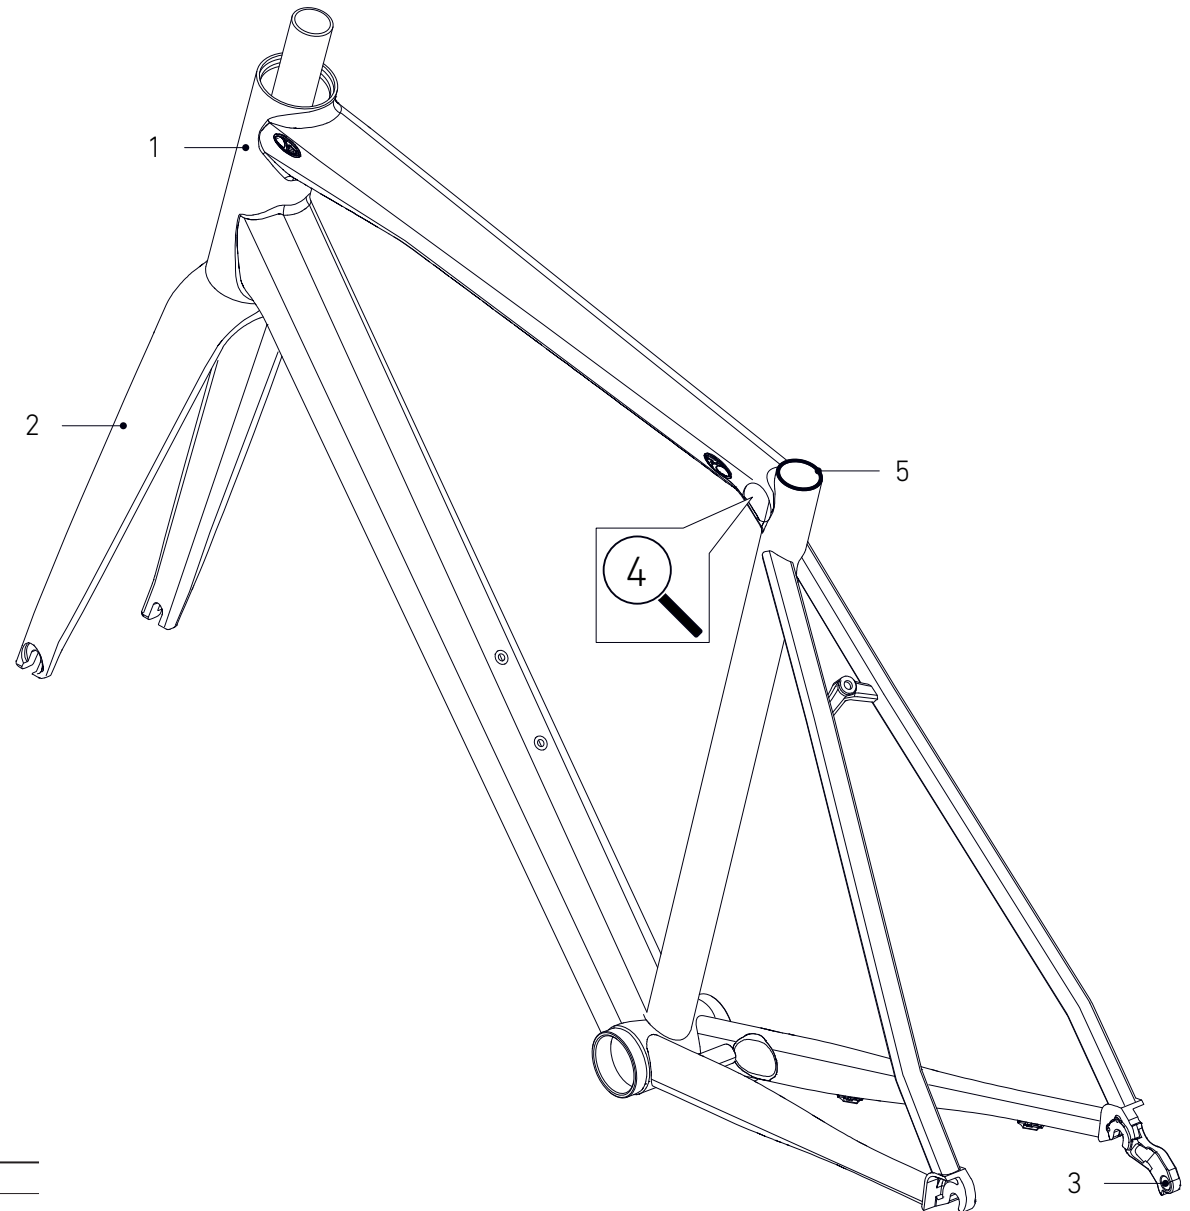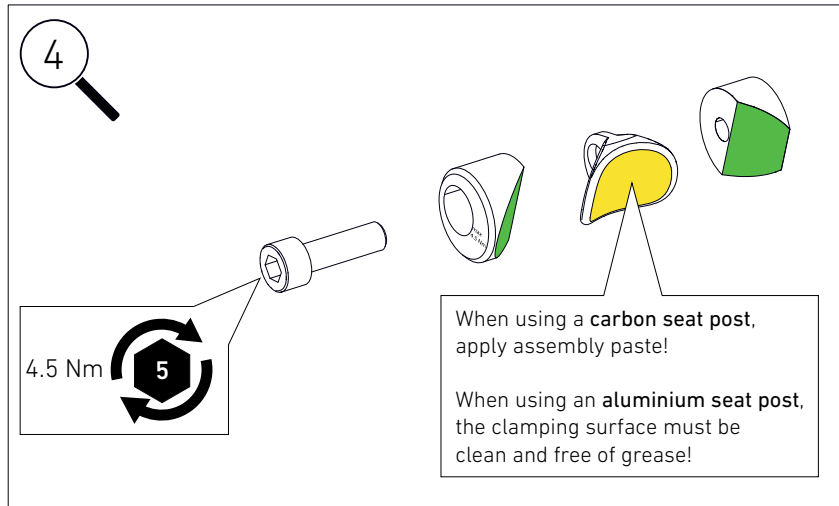


### FRAME SPARE PARTS

POS.	DESCRIPTION	SPECIFICATIONS	ART. NR.
1	frame	color: red	2291096
		color: grey	2291097
2	fork	color: red, size: 650B	2291119
		color: red, size: 28"	2291104
		color: grey, size: 650B	2291120
		color: grey, size: 28"	2291105
3	derailleur hanger	QR direct mount	2297414
4	seatpost clamp	3 pieces + fixing screw M6 x 20 mm	2312064
5	rubber ring	dirt seal seat tube	2256912

GREASE	DYNAMIC GALLI BEARING 100 g	49217800
	DYNAMIC GALLI BEARING 400 g	49217900
CARBON ASSEMBLY PASTE	for example DYNAMIC, Art. Nr. 25377201	

# PRO SL

## RIM BRAKE FRAME DETAILS

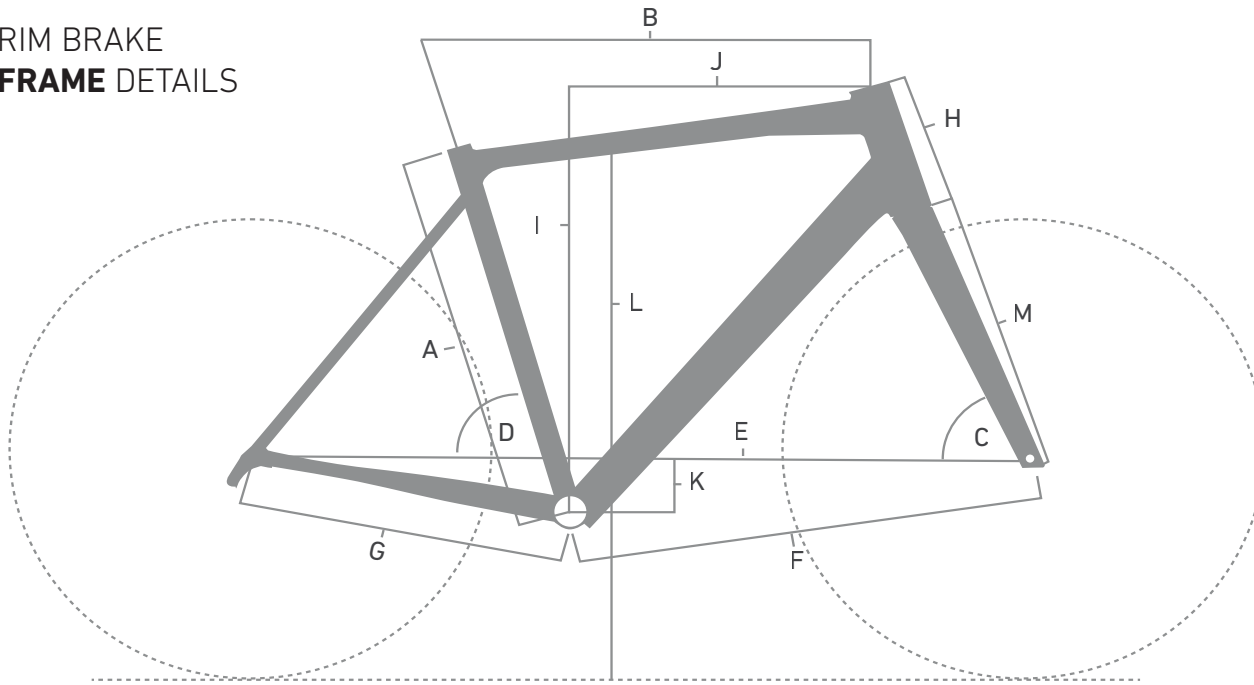

## FRAME INTERFACES

<b>BOTTOM BRACKET</b>	Shimano: SM-BB72-41B Pressfit
<b>HEADSET</b>	ACROS, Art. Nr. 2292463
<b>FRONT WHEEL AXLE</b>	QR
<b>REAR WHEEL AXLE</b>	QR
<b>FRONT HUB SPACING</b>	100 x 5 mm
<b>REAR HUB SPACING</b>	130 x 5 mm
<b>Ø SEATPOST</b>	27.2 mm
<b>MAX. TIRE SIZE</b>	25 mm
<b>MAX. CHAINRING SIZE</b>	50 / 34
<b>BOTTLE CAGE</b>	yes, 2x

**MAX SYSTEM WEIGHT (RIDER + BICYCLE + CLOTHING + GEAR + LUGGAGE): 110 KG**  
**INTENDED USE: DIN 17406 CATEGORY 6**

## FRAME GEOMETRY

SIZE		45	48	51	53	55	57	59	61	63	65
SEATTUBE LENGTH [MM]	A	420	445	475	495	505	515	535	560	580	605
TOPTUBE LENGTH HORIZONTAL [MM]	B	497	508	521	533	545	558	572	588	606	626
HEAD TUBE ANGLE	C	71°		71.5°	72°		72.5°	72.75°	73°	73.25°	73.5°
SEAT TUBE ANGLE	D	75°		74.5°	74.25°	74°	73.75°	73.5°	73.25°	73°	72.75°
WHEELBASE [MM]	E	963	975	973	980.5	993.5	999.5	1010	1026	1038	1058
FRONT CENTER [MM]	F	566	578	580.5	586	595.5	601.5	611	621.5	634	647.5
REAR CENTER [MM] (CHAINSTAY LENGTH)	G	404		406		409		414		420	
HEADTUBE LENGTH [MM]	H	120	140	133	147	163	180	193	210	228	245
STACK [MM]	I	493	512	533	548	563	581	591.5	608.5	627	644
REACH [MM]	J	365	371	373	378.5	383.5	388.5	397	405	414.5	426
BB DROP [MM]	K	59		73			70				
STANDOVER HEIGHT [MM]	L	698	720	758	775	793	811	826	847	865	882